

Competence creates Confidence.




• Model no. 1618

## BURST CHAMBER FOR FITTINGS

ASTM D 1599

For burst pressure tests up to 200 bar on plastic fittings with inside diameter up to 160 mm with 3-dimensional loading.

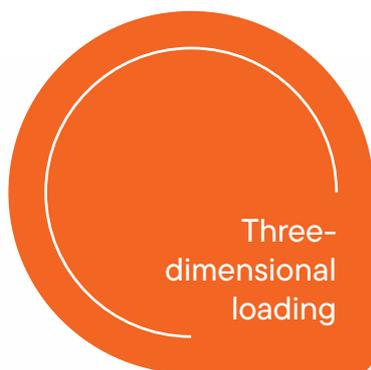


Three-dimensional loading



**Reliable protection from splinters during testing thanks to robust drum chamber**

- You can perform burst tests of up to 200 bar with the greatest possible operational safety using the convenient connection adapter for fittings up to DN 160 mm, the swivelling sample holder and the easily accessible, robust drum chamber.
- The components of the burst pressure testing system consist of the burst chamber, burst tester 1722 and end closures for burst tests 1617.

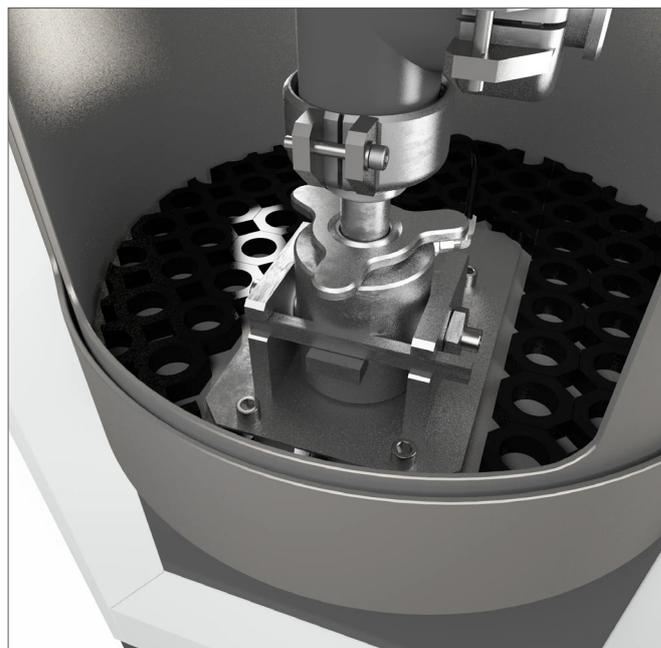

**Standard features**

- Burst pressure tests of up to 200 bar in combination with a burst tester
  - Easy and quick installation of end closures and convenient connection of samples using an adapter on the swivelling holding fixture
- 
- Reliable protection during testing thanks to a robust burst chamber

**Design of BURST CHAMBER FOR FITTINGS**

V1618-0001

Width x Depth x Height	mm	725 x 895 x 1,770
Internal burst chamber	mm	Ø 580 height 850
Weight	kg	approx. 260