

Competence creates Confidence.




• Model no. 1623

BURST CHAMBER FOR FITTINGS WITH SWIVEL RESTRAINT JIG

ASTM D 1599

For burst pressure tests up to 200 bar on injection moulded fittings with diameters 16 – 110 mm.

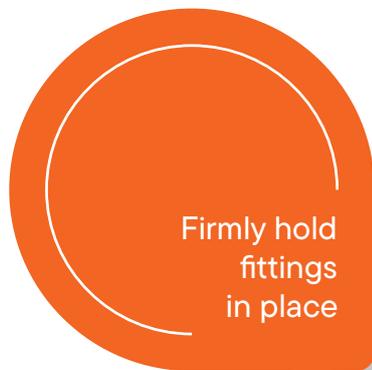

Firmly hold
fittings
in place



Standard features

- Any material change to the fitting can be recorded thanks to optimal positioning during testing
 - Variable adjustment of the sealing plugs allows for a variety of fitting shapes
-
- Suitable for fittings, e.g. T-pieces, branches and elbows
 - Easy and quick installation of end closures
-
- Clear view and reliable protection during the test through the inspection glass window in the swivelling safety hood

Design of BURST CHAMBER FOR FITTINGS WITH SWIVEL RESTRAINT JIG

V1623-0002

Width x Depth x Height	mm	1,000 x 870 x 1,550
Weight	kg	approx. 260

