

Competence creates Confidence.




● FOR MODELS 1751 – 1757

TEST BATH ACCESSORIES

System down to
the last detail



MANIFOLD

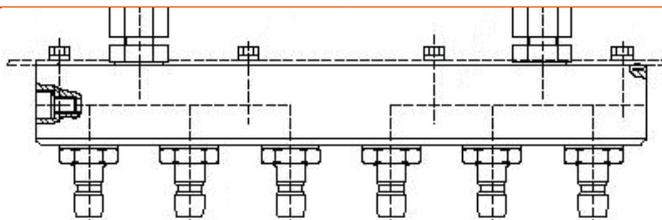

Brass version

- 2 x 3 polig DN 5
- 1 x 5 polig DN 5
- 1 x 6 polig DN 5
- 5 x 1 polig DN 5
- 6 x 1 polig DN 5

**Article-no.
Max. 125 bar**

**Article-no.
Max. 250 bar**

- V1540-0002
- V1540-0003
- V1540-0004
- V1540-0005
- V1540-0006

- V1540-0046
- V1540-0055
- *
- V1540-0076
- V1540-0066

Stainless steel version

- 2 x 3 polig DN 5
- 1 x 5 polig DN 5
- 1 x 6 polig DN 5
- 5 x 1 polig DN 5
- 6 x 1 polig DN 5


**Article-no.
Max. 125 bar**

**Article-no.
Max. 250 bar**

- V1725-0001
- V1725-0015
- *
- V1725-0004
- V1725-0005

- *
- *
- *
- *
- *

CONNECTION HOSE

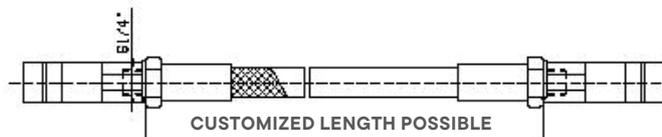

Lenght

- 500 mm
- 1000 mm
- 1500 mm
- 2000 mm
- 2500 mm
- 3000 mm

**Article-no.
Max. 125 bar**

**Article-no.
Max. 250 bar**


- V1074-0007
- V1074-0002
- V1074-0003
- V1074-0004
- V1074-0005
- V1074-0006

- *
- V1074-0023
- V1074-0022
- V1074-0033
- *
- *

Further lengths available upon request.

* available upon request

RAILS FOR SAMPLE SUSPENSION

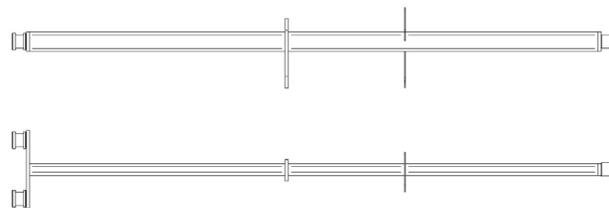

For inside test bath width x rail thickness


Permissible weight

Article-no.

For inside test bath width 500 x 30 mm	80 kg
For inside test bath width 700 x 30 mm	60 kg
For inside test bath width 1.000 x 30 mm	160 kg
For inside test bath width 1.500 x 30 mm	108 kg
For inside test bath width 2.000 x 30 mm	80 kg
For inside test bath width 2.000 x 60 mm	460 kg

V1079-0052
V1079-0053
V1079-0043
V1079-0048
V1079-0051
V1590-8029

SUSPENSION HOOK „EASY LIFT“



For suspension rails in mm


Permissible weight

Article-no.

50 x 30 mm	15 kg
50 x 30 mm	330 kg
100 x 60 mm	15 kg
100 x 60 mm	270 kg
100 x 60 mm	330 kg
100 x 60 mm	650 kg

V1079-218
V1079-2187
V1079-2178
V1079-2107
V1079-2190
V1079-2188

PLUGS



Thread


bar

Article-no.

G 1/4"	max. 125 bar
G 1/4"	max. 125 bar
G 1/8"	max. 250 bar
G 1/8"	max. 250 bar
Double Plug	

1181-2011
1181-2056
1181-2118
1181-2141
1181-2095

BLIND COUPLING



Version


bar

Article-no.

Blind coupling brass DN 5	max. 125 bar
Blind coupling brass DN 6,5	max. 250 bar
Blind coupling stainless steel DN 5	max. 125 bar
Blind coupling stainless steel DN 6,5	max. 250 bar

V1057-0001
V1057-0005
V1057-0002
V1057-0006

BLEEDING SCREW



Version

Article-no.

Bleeding screw 1/4" with insert
Bleeding screw 1/8" with insert

1181-8003
1181-8009